



Maritime 4G-LTE Broadbrand Antenna Communication System

KINGSA

Z series

- High Gain, Omnidirectional Antenna
- -Builtin 4G router, simplistic design
- Easy to Setup and Use, Less Maintanence
- Support All Available Band Networks for 4G-LTE
- Outdoor Design, Water Proof
- PoE Power Supply , Easy to Wiring
- Dedicated to Marine Industry , High Stability



Designer and Manufacturer of Maritime Antennas

KINGSAT is focuse on RF parts for 20 years, it is turn-key supplier of R&D, manufacturing and Sales as a whole. The maritime TVRO and VSAT satellite antennas are widely sold in domestic market and oversea market.Products are high reliable with high gain, excellent performance which wins great reputation in the market.

Easy to Setup and Use, Less Maintanence

Friendly design, Industry-Grade outdoor 4G Router. Power supply of POE design ensure "The shorter RF cable, the better signal is". Even beginners can complete the configuration and surf the Internet successfully within minutes.4G router supports all available band networks for 4G-LTE to satisfy customers flexible selection.

Stable and Reliable Quality with Excellent RF Performance

Customized for coastal 4G signals. Select high quality accessories strictly from inside to outside. The self-developed RF parts and structural devices are used to ensure the antenna's excellent performance.Provide users with 4G-LTE broadband access for a long time under all kinds of harsh environments service.


The High Gain, The Further You Sail

Adopt the stable and mature 4G-LTE antenna array units to satisfy omni-direction.Using six high gain sector antennas for omnidirectional coverage, to ensure full individual direction signals receive best. In the case of obstacle-free with line-of-sight, signal can be extended as far as 40km away from the base station.





Model	Zó
Mechanical Specification	
Radome Size	78 X 80CM (31" X 31.5")
Weight	18 KG
Radome Material	ASA
Electrical Performance	
Frequency Range	1710-2700MHz
Beamwidth	H: 360°(Omni-Direction) E:≥ 12°±2
Gain	High Band ≥14dBi
Electrical Downtilt	0°
Side lobe suppression	≥14dB
VSWR	≤1.6
Polarization	Vertical
Connector Type	N type
Outdoor 4G Router Specification	
Network Support	TDD-LTE B38/B39/B40/B41, FDD-LTE B1/B3/B5/B8(All available 4G-LTE band support)
Nominal Maximum Speed (4G-LTE)	Downlink: 150Mbps, Uplink: 50Mbps
LAN port	1 * 10/100M Ethernet Port
SIM card	support 1.8/3.3V standard SIM card (SIM card slot adaptor supplied)
POE adaptor	AC110-220V to POE Adaptor, Output 12V/1A
Working Environment	
Operation Temperature	-25° ~ 55°C
Storage Templerature	-30° ~ 85°C
Humidity	Up to 100% @ 40°C
Wind Speed	60m/sec max from any direction
Water Proof	IP56
Cable Connection Diagram	

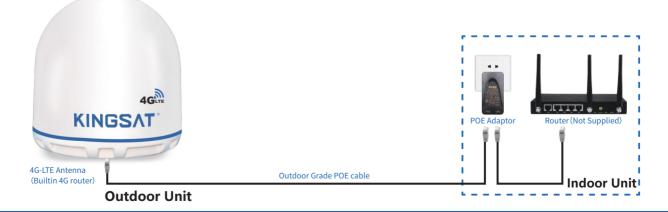

KINGSAT Maritime Antennas